


EN

DE



Installationsanleitung

Balkonkraftwerk
Boden / Wand / Geländer

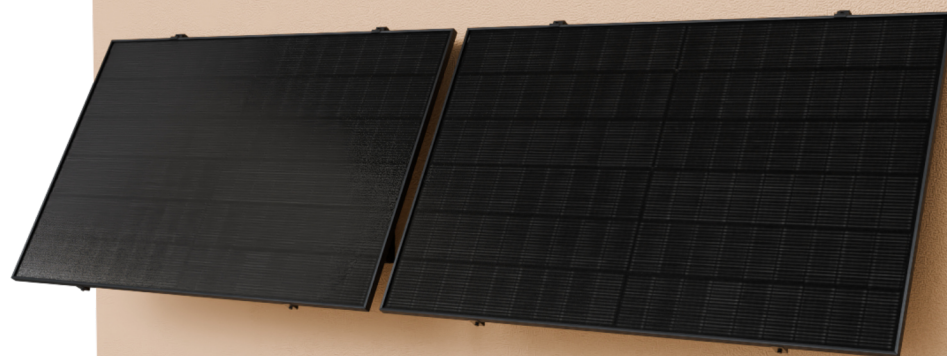

1. Werkzeuge für die Installation



Inbusschlüssel 6mm
(M8 Innensechskantschraube)




Maßband



13mm Maulschlüssel

2. Verpackung und Details

(Zubehör unterliegt dem tatsächlichen Produkt)

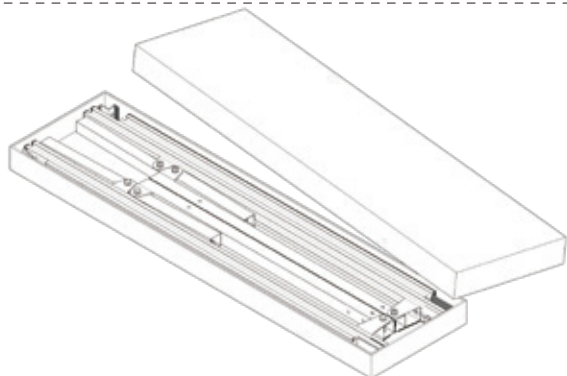


☑ x 2




Zwei Sätze Stative.

☑ x 2



Schrauben für Wechselrichter

☑ x 2




Haken

☑ x 2




Unterer Verschluss

☑ x 4



Endkappe 0047


☑ x 2




Endkappe 0048

3. Installationsanweisung



3.1 Nehmen Sie das Stativ heraus und klappen Sie es auf

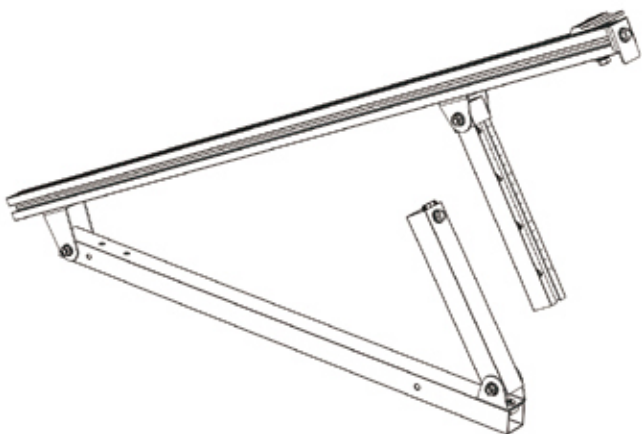

3.2 Drehbares Stativ, Stecken Sie das eine Ende der Säule mit den Skalenmarkierungen (L026) in das andere Vierkantrohr (L025)

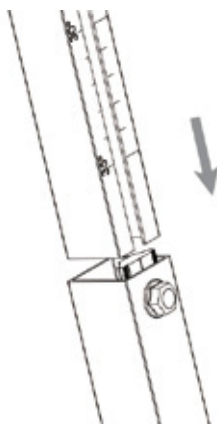


3.3 Richten Sie die Skala durch Einstellen der Einstecktiefe von L026 aus, stellen Sie den Winkel des Dreieckes ein und verriegeln

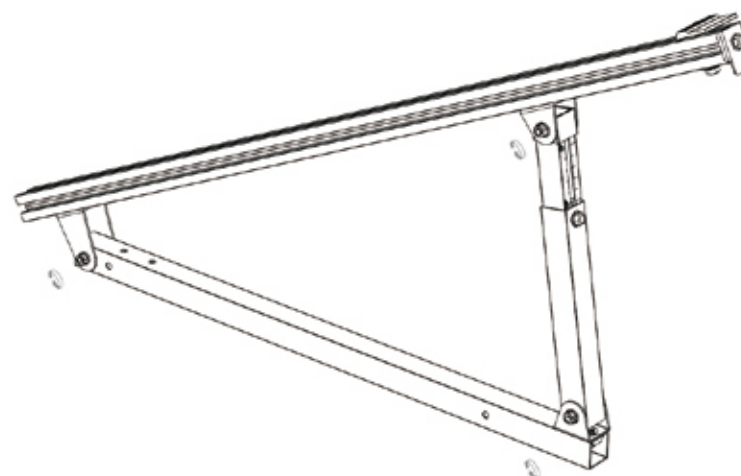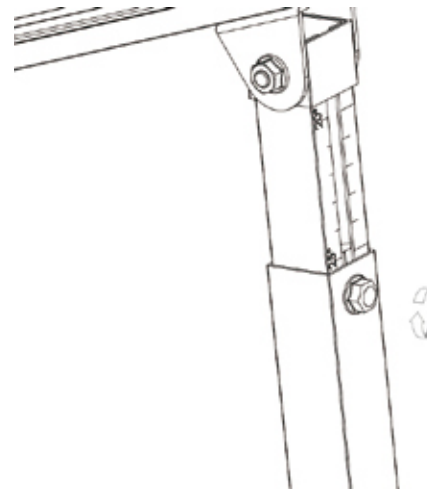


3.4 Wiederholen Sie die Schritte 3.1 bis 3.3 und richten Sie sie am ersten Stativ aus, um die Installation des zweiten Stativ abzuschließen




3.5 Installieren die Säule

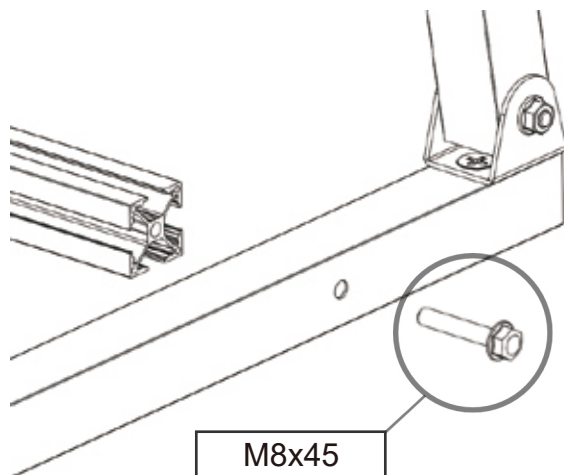


M8x45

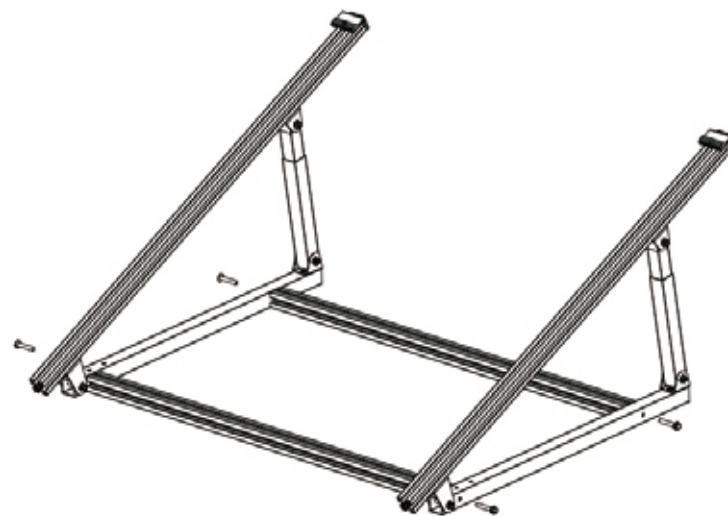



Note 1: Die Öffnungen an den Querstangen müssen nach oben und unten zeigen, wie unten gezeigt

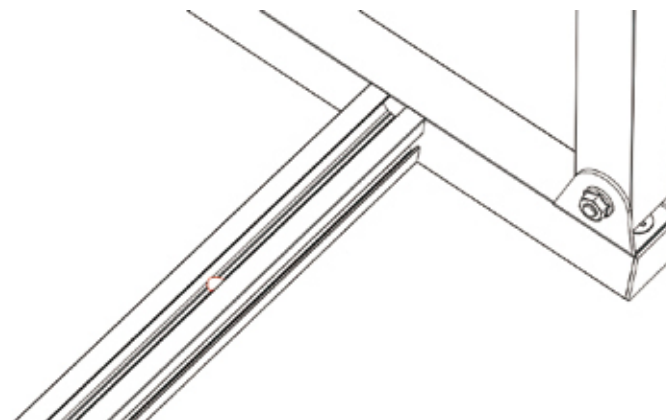

Hinweis: Bei der Montage auf dem Balkon erfordert dieser Schritt das Einschieben der Klemmen zur Befestigung des Balkons im Voraus, wie unten gezeigt

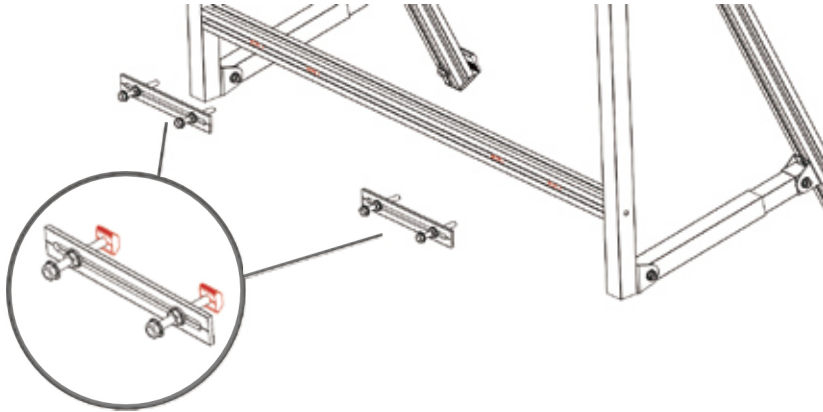



3.6 Installieren den Wechselrichter

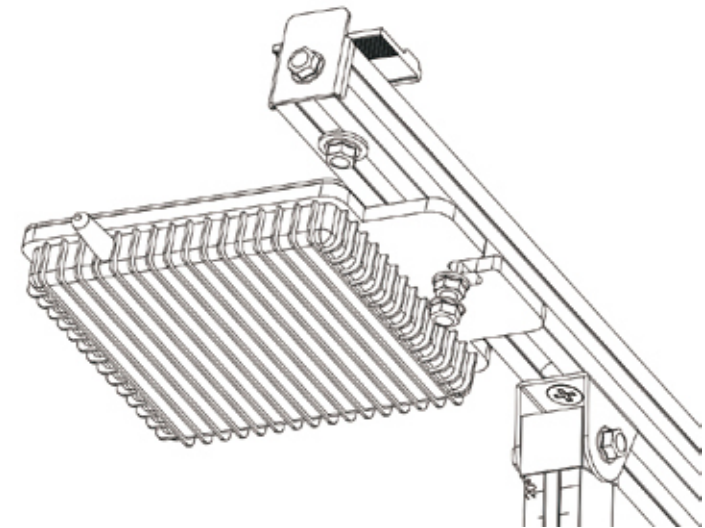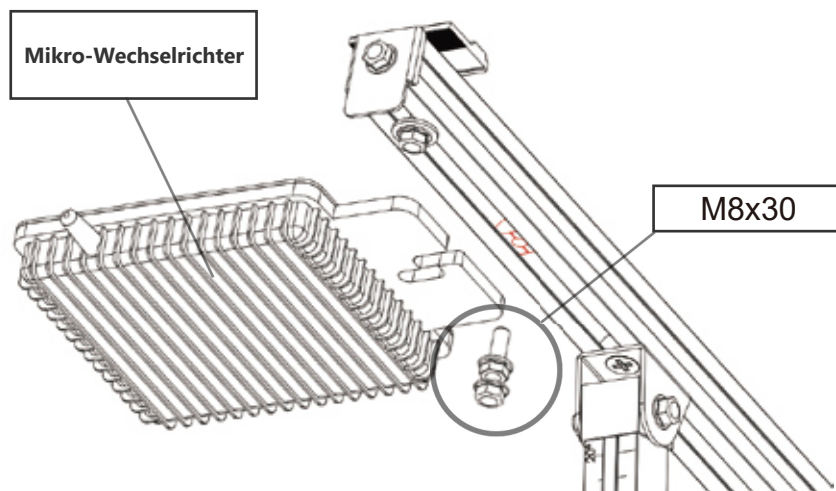



3.7 Installieren die Solarmodule

3.71 Setzen Sie das Solarmodul in die Rahmenklammern ein und ziehen Sie sie

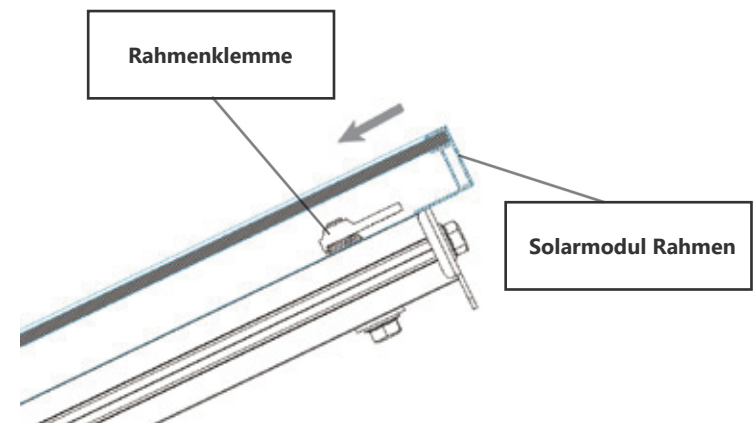


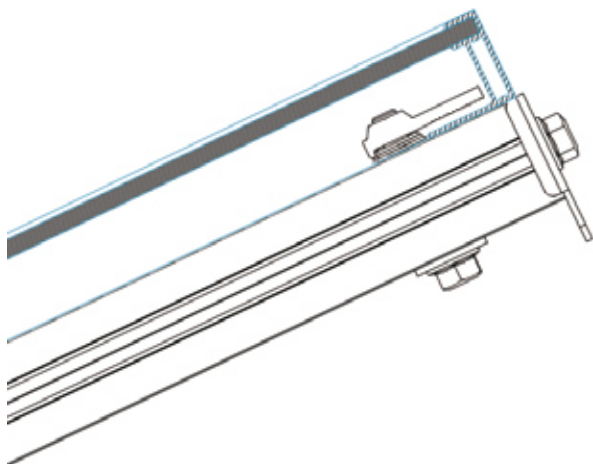


3.7.2 Drehen Sie die Abdeckung so, dass der erhabene Teil nach oben zeigt, um die Platte zu blockieren, und ziehen Sie die Schrauben leicht an

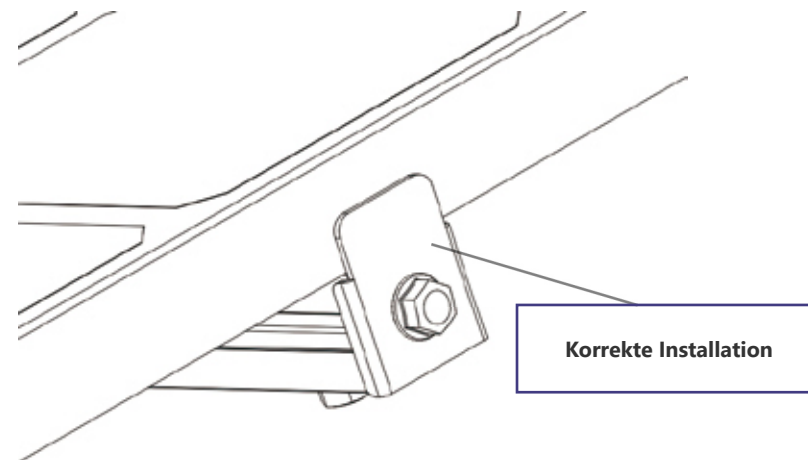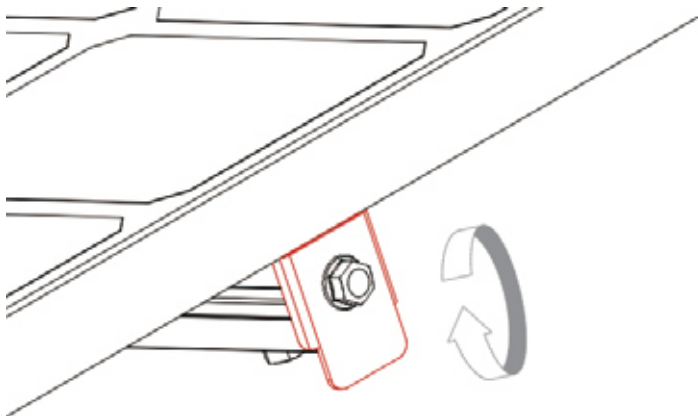


3.7.3 Drücken Sie das Solarmodul mit der Endklemme an und ziehen Sie sie leicht an


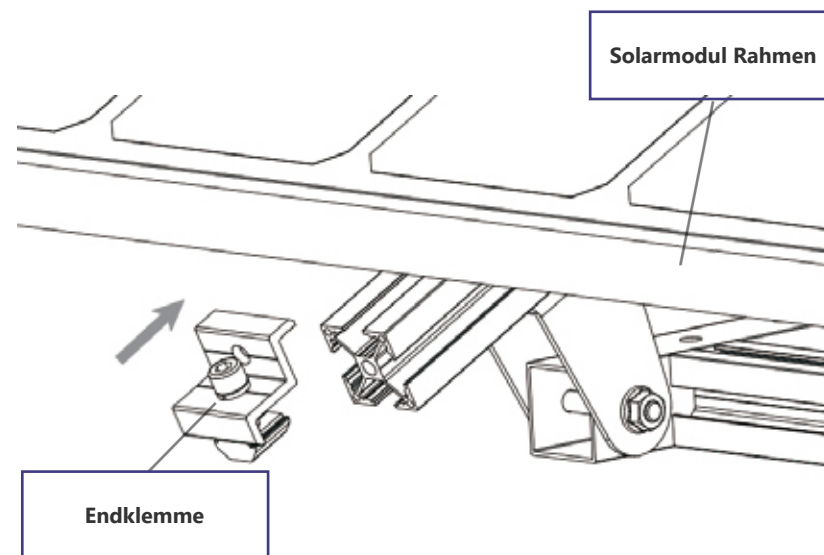


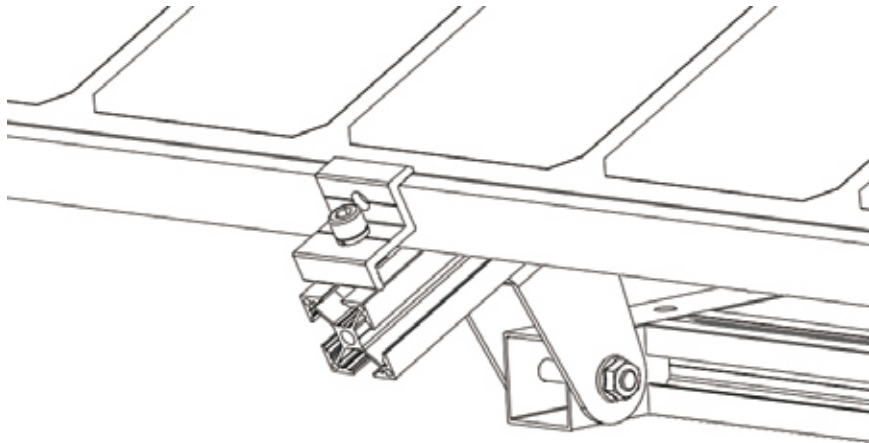



3.7.4 Richten Sie das Solarmodul richtig aus und ziehen Sie dann die Schrauben in den Schritten 3.7.1 und 3.7.2, 3.7.3 fest, Und die Installation ist abgeschlossen

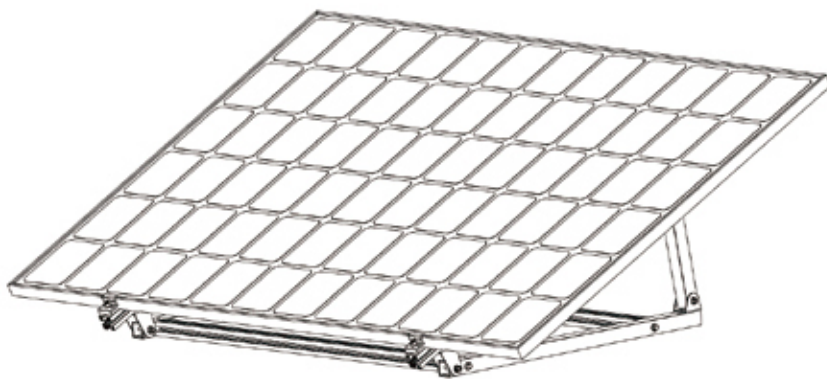



3.8 Installieren Sie die Gummikappe

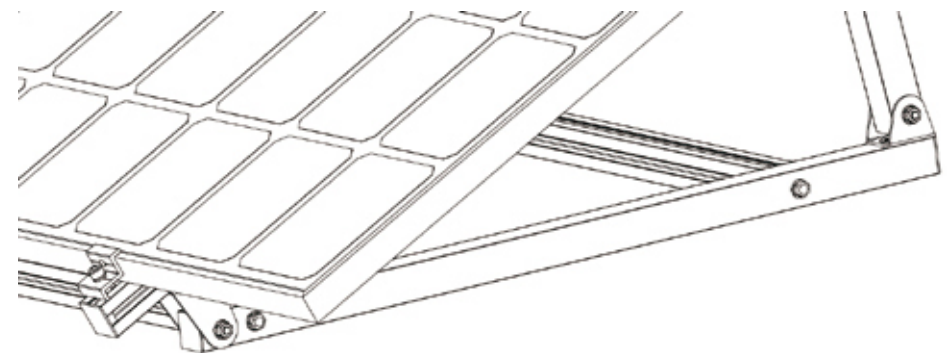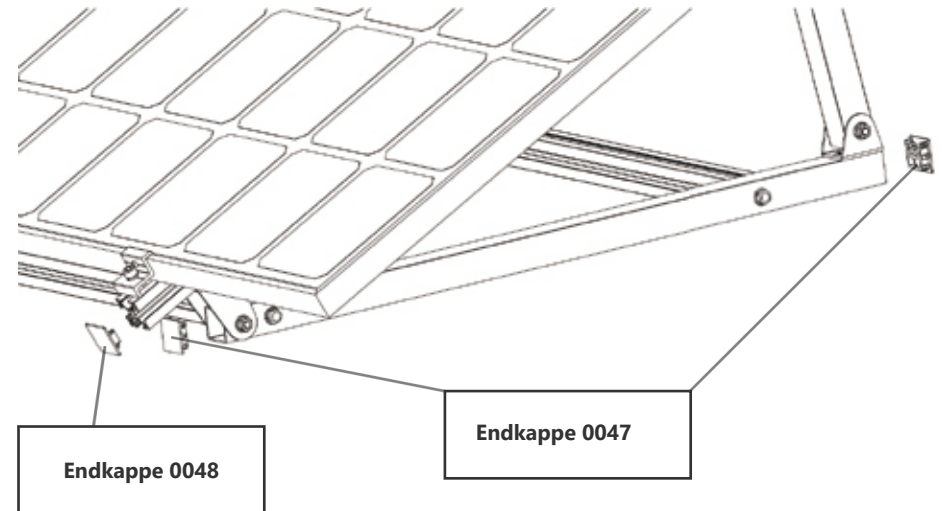


3.9 Stellen Sie die Halterung auf den flachen Boden. Die Installation ist abgeschlossen

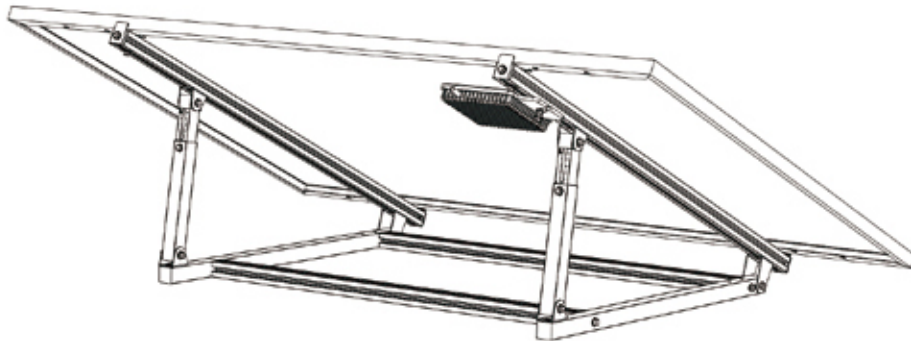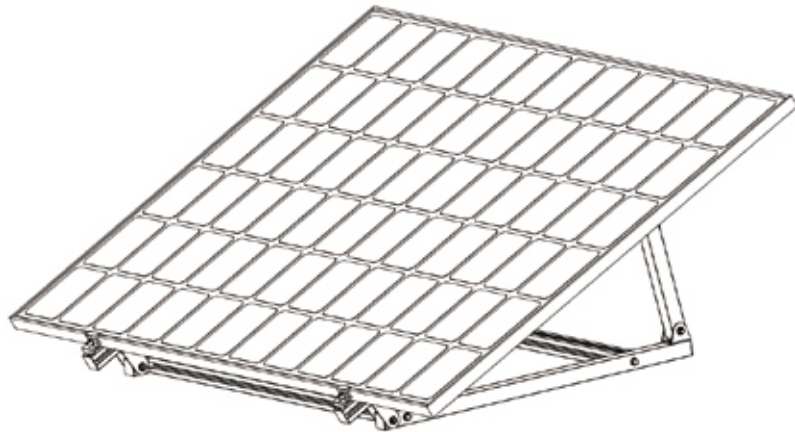


Szene auf dem Balkon

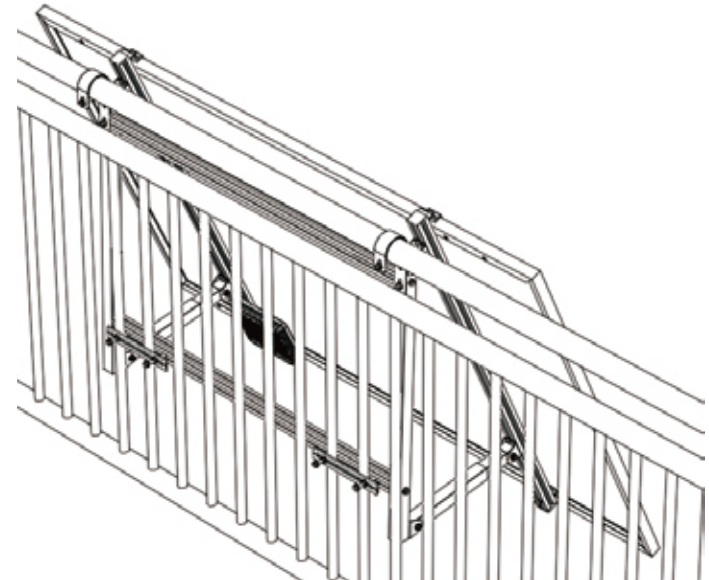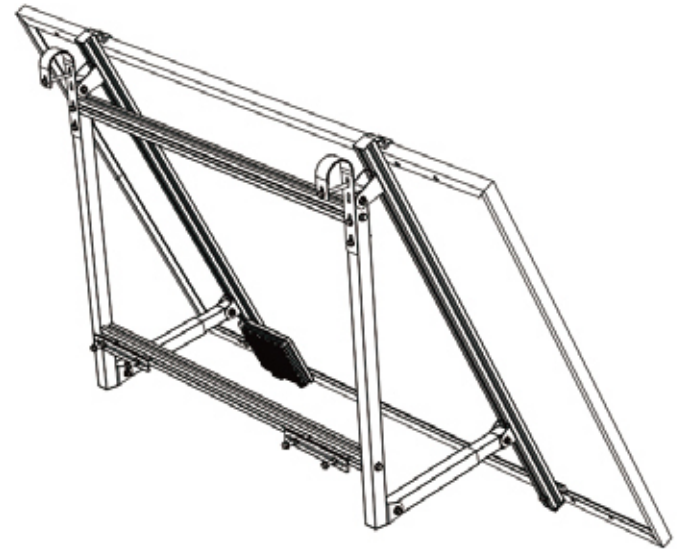



Detail der Haken

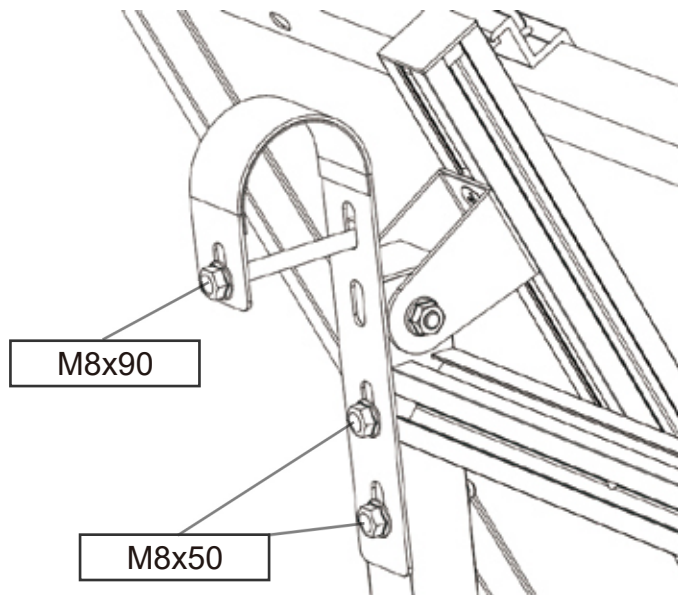

Detail des unteren Verschlusses

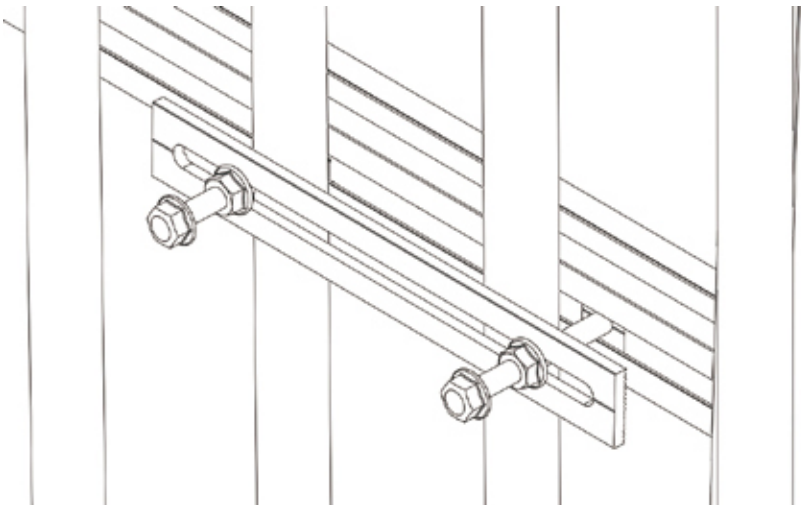

Szene an der Wand

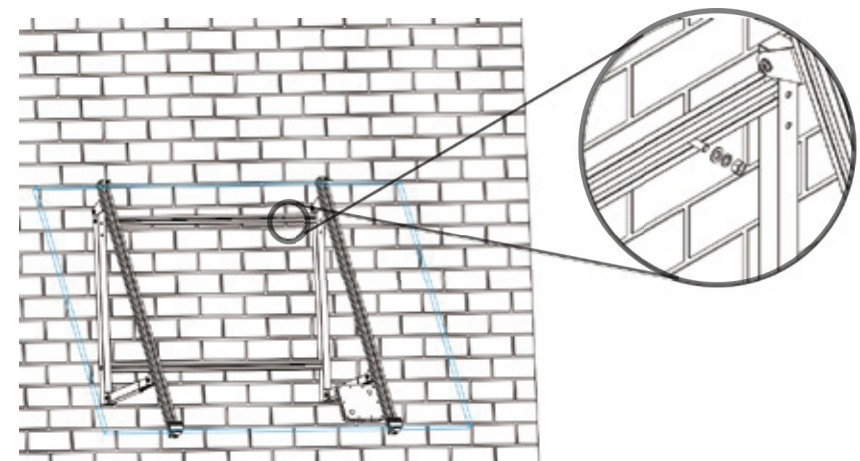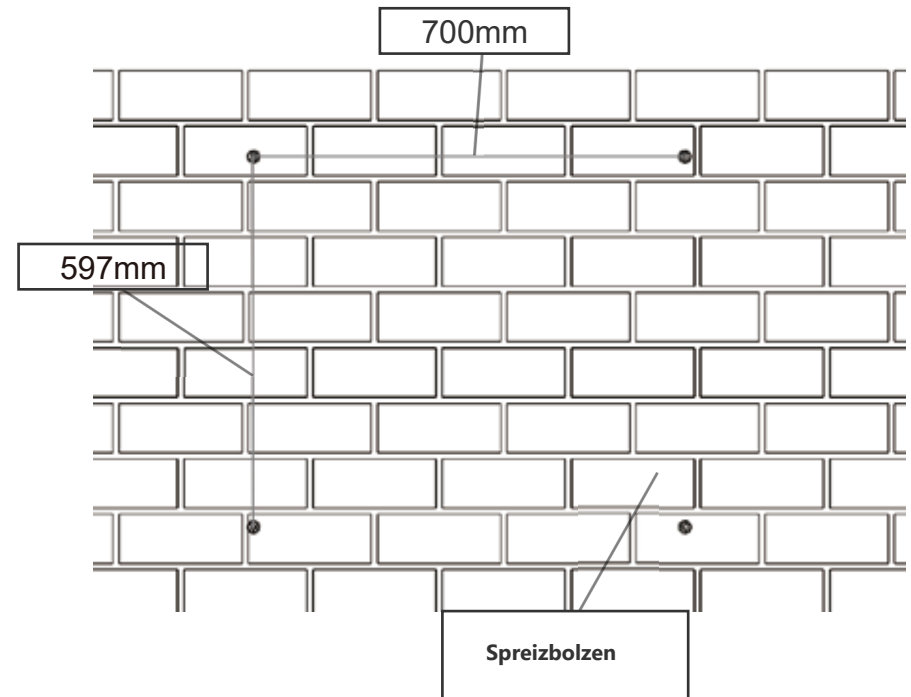

Purchaser/End User/Installer Notice:

Purchasers should confirm whether they are able to install this product and obtain relevant permits in accordance with local laws and regulations, including but not limited to government, community, adjacent property owners, and property rights holders.

Purchasers should engage qualified installers, professionals, or self-install only where permitted by law.

Purchasers should also ensure that the installation supports the building or its accessories safely and meets installation requirements, and is sufficient to support the product and its photovoltaic power generation system for over 20 years.

Purchasers should not install or use this product in environments with corrosive air or water, such as acids or alkalis in the vicinity.

Purchasers should fully assess and bear the consequences of product installation and usage and their impact on the surroundings, including but not limited to potential lightning strikes, electrical or magnetic conduction, light reflection/pollution, obstruction of passage, collision with people, snow accumulation and ice shedding, depreciation of buildings, and their consequences.

Purchasers are solely responsible for safety during installation, throughout the installation process, and subsequent usage, and/or any impact on third parties.

After installing the product, purchasers or their appointed installers should carry out waterproof, leak-proof, and anti-seepage construction at the junction of the product and the building to protect the building supporting the product, and conduct periodic inspections and maintenance in the future (at intervals not exceeding 1 year).

Purchasers should be aware that nothing other than the photovoltaic power generation system should be supported on this product, and no additional weight should be placed on the product during installation or subsequent usage, particularly human suspension or leaning. It should not be used for any purpose other than supporting photovoltaic brackets. Purchasers should be aware that nothing other than the photovoltaic power generation battery system should be supported on this product, and no additional weight should be placed on the product during installation or subsequent usage,

particularly human suspension or leaning. It should not be used for any purpose other than supporting photovoltaic brackets.

We shall not be liable for any consequences resulting from failure to comply with local legal requirements and/or failure to follow instructions, warnings, etc., during the installation of this product, nor shall we be liable for any losses to the supporting building or any third party resulting from the installation process or subsequent usage, nor shall we be liable for any multiple installations, disassembly and reuse, or second-hand purchases of this product.